


G80 US TYPE SCREW PIN ANCHOR SHACKLE



- Standard: Meets performance requirements of US Fed. Spec. RR-C271F Type IVA, Grade B
- Production Process: Drop Forged
- Material: Superior Alloy Steel for shackle body and pin
- Heat Treatment: Quenching and Tempering
- Safety Factor: Minimum Ultimate Load is 5 times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153, Powder Coated or Self-Colored
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size (in.)	Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)									Tolerance +/-
			A	B	C	D	E	F	H	L	G	
3/8	2	0.14	16.8	11	63	9.6	26.2	23.4	36	45.4	51	5%
7/16	2-2/3	0.2	19	12.7	73.9	11.2	29.5	27	41.4	51.9	60	5%
1/2	3-1/3	0.33	20.6	16	83.5	12.7	33	30	46	58.5	68	5%
5/8	5	0.62	27	19	106	16	42	39	59	74	87	5%
3/4	7	1.0	31.8	22.2	125	19	51	47	69.8	89	101	5%
7/8	9-1/2	1.6	36.6	25.4	147	22	58	54	80.6	102	117	5%
1	12-1/2	2.33	43	28.5	166	25	68	60	93	118	135.5	5%
1-1/8	15	3.05	46	31.7	185	28	74	66	102	130	146	5%
1-1/4	18	4.31	51.5	35.1	208	32	82	76	115.5	146	161	5%
1-3/8	21	5.98	57	38	228	35	89	84	127	159	172	5%
1-1/2	30	7.21	60.5	41.5	254	38	98	92	136.5	174	187	5%
1-3/4	40	12.7	73	50.8	303	45	127	109	163	217	220	5%
2	55	20.4	82.5	57.1	341	51	146	127	184.5	248	241	5%
2-1/2	85	38	105	69.8	455	66.5	179	150	235	321	316	5%
3	120	64	127	85	546	76	200	165	279	371	361	5%

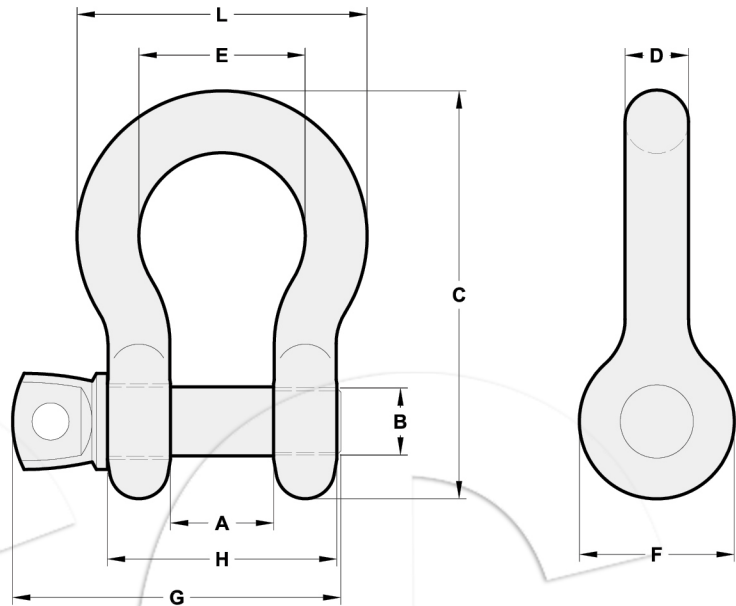