


EN13889 SCREW PIN ANCHOR SHACKLE

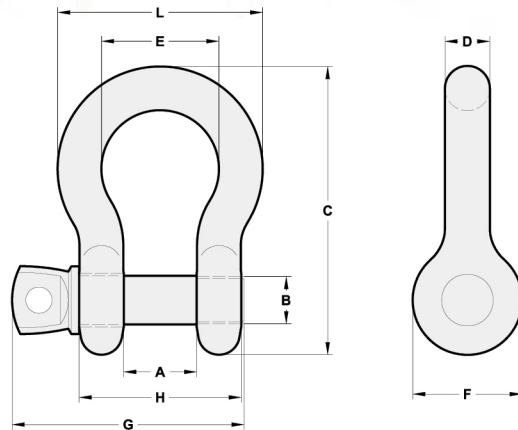

- Standard: Meets EN13889 and US Fed. Spec. RR-C271F Type IVA, Grade A
- Production Process: Drop Forged
- Material: High Strength Steel for shackle body and pin
- Heat Treatment: Quenching and Tempering
- Safety Factor: Minimum Ultimate Load is 6 times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153, Powder Coated or Self-Colored
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size (in.)	Working Load Limit (t)	Weight Each (lbs.)	Dimensions (in.)									Tolerance +/-
			A	B	C	D	E	F	H	L	G	
3/16	0.33	0.03	9.7	6.3	37.3	4.8	15.2	14.2	19.3	24.8	29.2	5%
1/4	0.5	0.05	11.9	8	46.7	6.4	19.8	15.7	24.7	32.6	37	5%
5/16	0.75	0.09	13.5	9.5	53	7.9	21.3	19	29.3	37.3	43.4	5%
3/8	1	0.14	16.8	11	63	9.6	26.2	23.4	36	45.4	51	5%
7/16	1.5	0.2	19	12.7	73.9	11.2	29.5	27	41.4	51.9	60	5%
1/2	2	0.33	20.6	16	83.5	12.7	33	30	46	58.5	68	5%
5/8	3.25	0.62	27	19	106	16	42	39	59	74	87	5%
3/4	4.75	1	31.8	22.2	125	19	51	47	69.8	89	101	5%
7/8	6.5	1.6	36.6	25.1	147	22	58	54	80.6	102	117	5%
1	8.5	2.33	43	28.5	166	25	68	60	93	118	135.5	5%
1-1/8	9.5	3.05	46	31.7	185	28	74	66	102	130	146	5%
1-1/4	12	4.31	51.5	35.1	208	32	82	76	115.5	146	161	5%
1-3/8	13.5	5.98	57	38	228	35	89	84	127	159	172	5%
1-1/2	17	7.21	60.5	41.5	254	38	98	92	136.5	174	187	5%
1-3/4	25	12.7	73	50.8	303	45	127	109	163	217	220	5%
2	35	20.4	82.5	57.1	341	51	146	127	184.5	248	241	5%
2-1/4	42.5	29	95	63	382	57	160	143	209	274	295	5%
2-1/2	55	38	105	69.8	456	66.5	179	150	235	321	316	5%
3	85	64	127	85	546	76	200	165	379	371	361	5%