


EN13889 SAFETY BOLT ANCHOR SHACKLE



- Standard: Meets EN13889 and US Fed. Spec. RR-C271F Type IVA, Grade A
- Production Process: Drop Forged
- Material: High Strength Steel for shackle body and pin
- Heat Treatment: Quenching and Tempering
- Safety Factor: Minimum Ultimate Load is 6 times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153, Powder Coated or Self-Colored
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size (in.)	Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)										Tolerance +/-
			A	B	C	D	E	F	H	K	L	P	
1/4	0.5	0.048	11.9	8	28.7	6.4	19.8	15.7	46.7	24.7	32.6	42	5%
5/16	0.75	0.1	13.5	9.5	31	7.9	21.3	19	53	29.3	37.3	49	5%
3/8	1	0.16	16.8	11.1	36.6	9.6	26.2	23.4	63	36	45.4	59.5	5%
7/16	1.5	0.22	19	12.7	43	11.2	29.5	27	73.9	41.4	51.9	65	5%
1/2	2	0.34	20.6	16	47	12.7	33	30	83.5	46	58.5	77.5	5%
5/8	3.25	0.68	27	19	60	16	42	39	106	59	74	97	5%
3/4	4.75	1.11	31.8	22.1	71	19	51	47	125	69.8	89	109	5%
7/8	6.5	1.66	36.6	25.1	84	22	58	54	147	80.6	102	123	5%
1	8.5	2.35	43	28.1	96	25	68	60	166	93	118	139	5%
1-1/8	9.5	3.22	46	31.7	107	28	74	66	185	102	130	149	5%
1-1/4	12	4.98	51.5	35.1	119	32	82	76	208	115.5	146	171	5%
1-3/8	13.5	6.36	57	38	131	35	89	84	228	127	159	186	5%
1-1/2	17	8.24	60.5	41.5	148	38	98	92	254	136.5	174	194	5%
1-3/4	25	14.29	73	50.8	177	45	127	109	303	163	217	228	5%
2	35	20.1	82.5	57.1	197	51	146	127	341	184.5	248	260	5%
2-1/4	42.5	31.4	95	63	221	57	160	143	383	209	274	302	5%
2-1/2	55	43.6	105	69.8	264	66.5	184	150	455	235	321	328	5%
3	85	67	127	85	328	76	200	165	546	279	371	378	5%
3-1/2	120	113	133	95	371	92	229	203	632	323	432	425	5%
4	150	141	140	107	368	104	254	228	651.5	340	457	452	5%

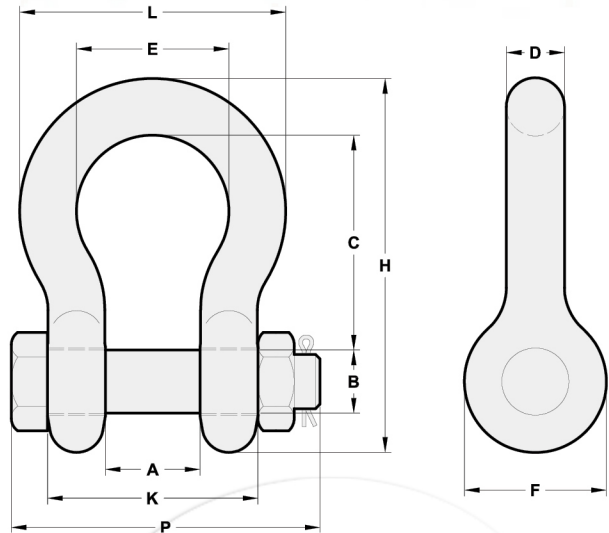