


EN13889 SCREW PIN CHAIN SHACKLE



- Standard: Meets EN13889 and US Fed. Spec. RR-C271F Type IVA, Grade A
- Production Process: Drop Forged
- Material: High Strength Steel for shackle body and pin
- Heat Treatment: Quenching and Tempering
- Safety Factor: Minimum Ultimate Load is 6 times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153, Powder Coated or Self-Colored
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size (in.)	Working Load Limit (t)	Weight Each (lbs.)	Dimensions (in.)							Tolerance +/-
			A	B	C	D	E	F	G	
3/16	0.33	0.03	9.5	6.3	37	5	14.5	19.5	29.2	5%
1/4	0.5	0.05	11.9	8	40.4	6.4	15.7	24.7	37	5%
5/16	0.75	0.08	13.5	9.5	48.5	7.9	19	29.3	43.4	5%
3/8	1	0.13	16.8	11	58.7	9.6	23.4	36	51	5%
7/16	1.5	0.2	19	12.7	67.8	11.2	27	41.4	60	5%
1/2	2	0.27	20.6	16	77	12.7	30	46	68	5%
5/8	3.25	0.57	27	19	96	16	39	59	87	5%
3/4	4.75	1.2	31.8	22.2	114	19	47	69.8	101	5%
7/8	6.5	1.43	36.6	25.4	134	22	54	80.6	117	5%
1	8.5	2.15	43	28.5	152	25	60	93	135.5	5%
1-1/8	9.5	3.06	46	31.7	168	28	66	102	146	5%
1-1/4	12	4.11	51.5	35.1	189	32	76	115.5	161	5%
1-3/8	13.5	5.28	57	38	208	35	84	127	172	5%
1-1/2	17	7.23	60.5	41.5	230	38	92	136.5	187	5%
1-3/4	25	12.1	73	50.8	272	45	109	163	220	5%
2	35	19.2	82.5	57.1	314	51	127	184.5	241	5%
2-1/4	42.5	26.6	95	63	342	57	143	209	295	5%
2-1/2	55	32.5	105	69.8	378	65	150	235	326	5%
3	85	54	127	85	417.5	76	165	279	381	5%

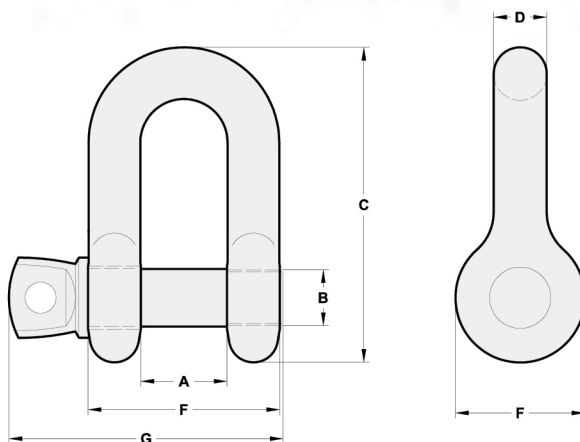

WARNING Never exceed Working Load Limit