


EN13889 SAFETY BOLT CHAIN SHACKLE



- Standard: Meets EN13889 and US Fed. Spec. RR-C271F Type IVA, Grade A
- Production Process: Drop Forged
- Material: High Strength Steel for shackle body and pin
- Heat Treatment: Quenching and Tempering
- Safety Factor: Minimum Ultimate Load is 6 times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153, Powder Coated or Self-Colored
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size (in.)	Working Load Limit (t)	Weight Each (lbs.)	Dimensions (in.)								Tolerance +/-
			A	B	D	F	M	G	K	P	
3/8	1	0.15	16.8	11.1	9.6	23.4	36	32.5	58.7	59.5	5%
7/16	1.5	0.19	19	12.7	11.2	27	41.4	37.6	67.8	65	5%
1/2	2	0.33	20.6	16	12.7	30	46	40.7	77	77.5	5%
5/8	3.25	0.67	27	19	16	39	59	50	96	97	5%
3/4	4.75	1.05	31.8	22.1	19	47	69.8	59.5	114	109	5%
7/8	6.5	1.55	36.6	25.1	22	54	80.6	71.5	134	123	5%
1	8.5	2.2	43	28.1	25	60	93	82	152	139	5%
1-1/8	9.5	2.9	46	31.7	28	66	102	90	168	149	5%
1-1/4	12	4.43	51.5	35.1	32	76	115.5	100	189	171	5%
1-3/8	13.5	6.24	57	38	35	84	127	111	208	186	5%
1-1/2	17	7.74	60.5	41.5	38	92	136.5	124	230	194	5%
1-3/4	25	12.6	73	50.8	45	109	163	145.5	272	238	5%
2	35	18.45	82.5	57.1	51	127	184.5	169.5	314	260	5%
2-1/4	42.5	28.9	95	63	57	143	209	181	342	302	5%
2-1/2	55	38.6	105	69.8	65	150	235	201	378	328	5%
3	85	56	127	73	71	157	160	243	383	409	5%

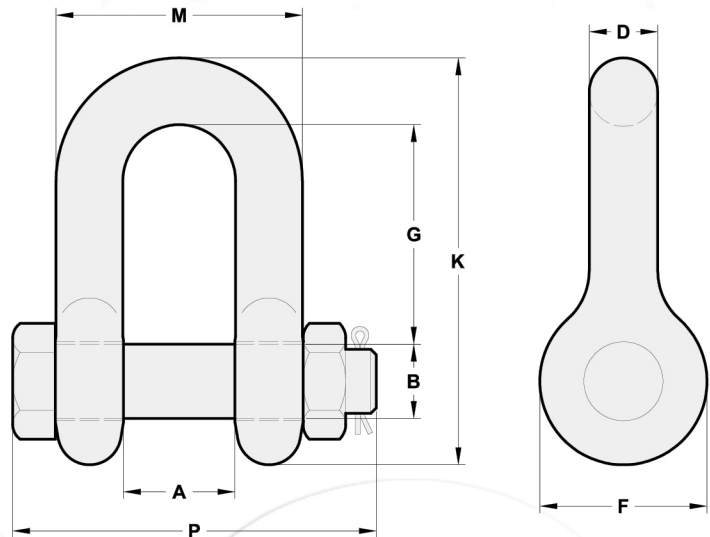

WARNING Never exceed Working Load Limit