



JIS SHACKLE, TYPE SB

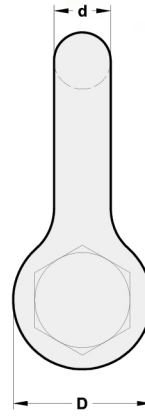

- Standard: Meet JIS SB Type
- Production Process: Drop Forged
- Material: Carbon Steel for Shackle Body and Pin
- Safety Factor: 4:1
- Finish: Hot Dip Galvanized or Electrogalvanized
- Certification: Material Certificates and Testing Certificates available when requested at the time of order
- Package: Packing available with Carton Box or Gunny Bag

Size	Working Load Limit (t)	Dimensions (mm)						Tolerance +/-
		t	d	B	D	d1	L	
SB20	2.5	20	20	31	50	24	67.5	5%
SB22	3	22	22	34	55	26	103	5%
SB24	3.6	24	24	39	62	30	110.3	5%
SB26	4.2	26	26	41	66	32	118.5	5%
SB28	4.8	28	28	43	70	34	126.5	5%
SB30	5.4	30	30	45	75	36	134.5	5%
SB32	6.2	32	32	48	80	38	147.5	5%
SB34	7	34	34	50	85	39.5	155.5	5%
SB36	8	36	36	54	90	41.5	168.5	5%
SB38	9	38	38	57	95	46	174.5	5%
SB40	10	40	40	60	100	48	187.5	5%
SB42	11	42	42	63	105	51	190.5	5%
SB44	12	44	44	66	110	54	202	5%
SB46	13	46	46	68	115	56	211	5%
SB48	14	48	48	72	120	58	218	5%
SB50	15	50	50	75	125	60	226	5%
SB55	18	55	55	83	138	65	246.5	5%
SB60	22	60	60	90	150	70	274	5%
SB65	26	65	65	98	164	77	298.5	5%
SB70	30	70	70	105	178	83	317.5	5%
SB75	35	75	75	112	192	90	341	5%
SB80	40	80	80	120	206	96	365	5%
SB85	45	85	85	128	220	102	388	5%
SB90	50	90	90	135	232	108	418	5%

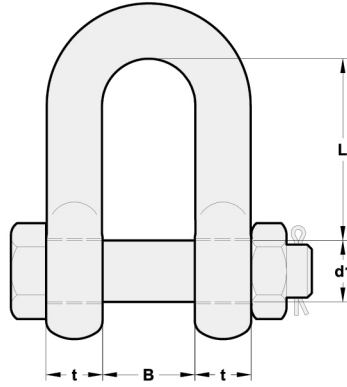